




Z-1700 SHOKTROL WATER HAMMER ARRESTORS

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

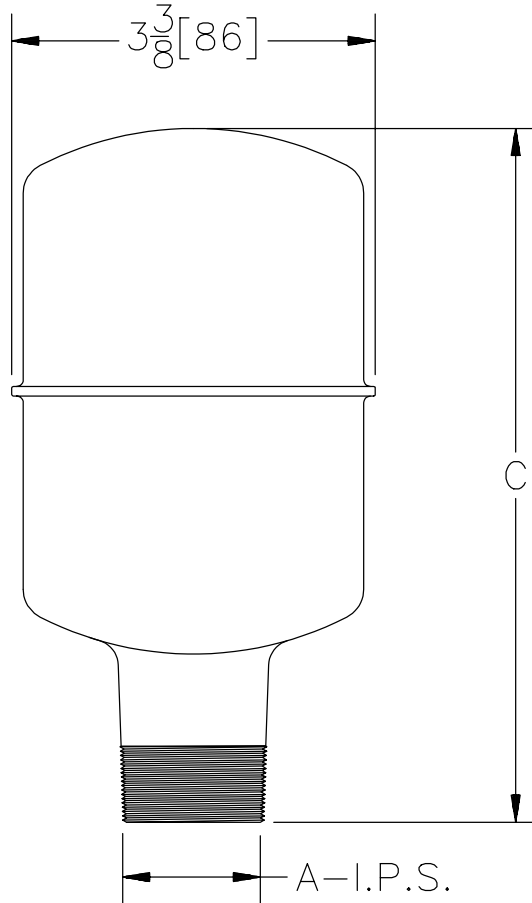

Size	A Inches [mm]	C	Approx. Wt. Lbs. [kg]
100	3/4 [19]	3 1/2 [90]	1 [.5]
200	3/4 [19]	3 1/2 [90]	1 1/2 [.7]
300	1 [25]	4 1/2 [114]	1 3/4 [.8]
400	1 [25]	6 5/8 [168]	2 3/4 [1.2]
500	1 [25]	7 1/2 [191]	3 1/4 [1.5]
600	1 [25]	8 1/2 [216]	3 3/4 [1.7]

ENGINEERING SPECIFICATION: ZURN Z-1700 Shoktrol Water Hammer Arrestors are regularly furnished in all stainless steel construction. Pipe threads are accurately machined to assure tight connection. 3/4" [19] male I.P.S. inlet is standard for the 100 and 200 size units, while 1" [25] male I.P.S. inlet is standard for 300 thru 600 size units.

All sizes of Zurn Z-1700 Shoktrol Water Hammer Arrestors are certified to the following specifications:

PDI WH-201
ANSI A112.26.1M
ASSE 1010

Where required in piping systems, properly sized water hammer arrestors shall be ZURN Z-1700 (specify size) with nesting type bellows contained within a casing having sufficient displacement volume to dissipate the calculated kinetic energy generated in piping system. Both casing and bellows constructed of Type 304 stainless steel.

REV. A	DATE: 2/05/96	C.N. NO. 74155
DWG. NO. 59412	PRODUCT NO. Z-1700	

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED